

VS92A



- 2-Port Video Splitter
- The VS92A is a video splitter that not only duplicates the video signal from any VGA, XGA, SVGA, UXGA, or multisync monitor to two outputs, but also boosts the video signal over a distance of up to 65 meters. Cascadable to support up to 8 displays, and offering bandwidth up to 350 MHz, the VS92A is ideal for broadcasting and enhancing video information to the public, monitoring your work environments from safe locations, or offering superior video for company or classroom training.



Features

- One video input to 2 video outputs
- Cascadable to 3 levels - provides up to 8 video signals
- Supports 350 MHz bandwidth
- Long-distance transmission - up to 65 m *
- Superior video quality - 1920 x 1440@60Hz
- DDC, DDC2, DDC2B Compatible (Port 1 only)
- Supports VGA, XGA, SVGA, UXGA, WUXGA and multisync monitors
- All metal casing


* Video content sent over very long distance using a VGA cable might result in slight degradation of the video signal and quality.

Specification

Display Connections		2/8*
Connectors	Video In	1 x HDB-15 Male (Blue)
	Video Out	2 x HDB-15 Female (Blue)
	Power	1 x DC Jack
LEDs	Power	1 (Orange)
Video	Resolution	1920 x 1440 @ 60Hz
	Bandwidth	350 MHz
Signal Range		65 m
Power Consumption		DC9V, 1.24W
Environment	Operating Temp.	0-50°C
	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	0.42 kg
	Dimensions (L x W x H)	13.00 x 7.59 x 4.40 cm

* Display connections in three-level cascade

Diagram

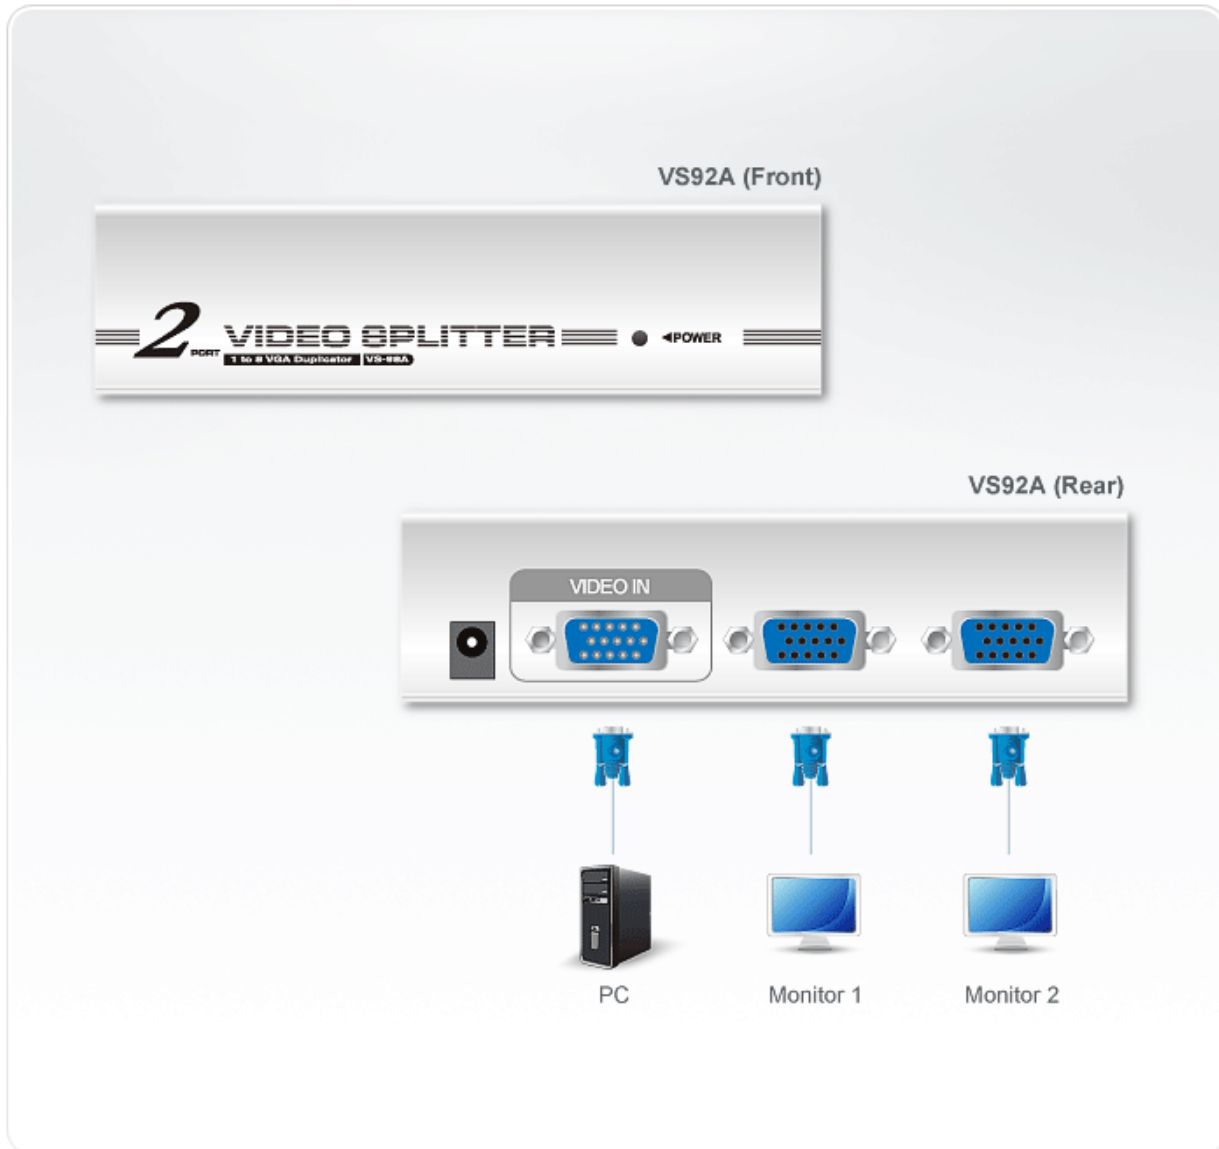

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2014 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.
